

DUAL LIGHTS AND ALTERNATE LIGHT MOUNTING OPTION

LENTRY® Systems With Dual Lights

Dual Lights are available on LENTRY Systems! The 2000 watt Honda® EU2000i generator is rated to provide 1600 watts continuously, so is powerful enough to run two 650 watt high-infrared lights. Dual lights provide 50,000 lumens of light in unlimited directions for more than four hours on a tank of gas!

For a **Dual Light LENTRY System**, you start with the EU2000i generator and the corresponding Frame/Legs, then just choose the heights of the telescoping 650w polelights you'd like. You can have both standard height, both XT (extra tall), or one of each as shown at left.

Fully extended, LENTRY Systems with XT lights stand approximately 8.5 feet tall; units with standard height lights stand about 4.5 feet (one of each shown at left).

LENTRY polelights are telescoping and articulated to aim in any direction. They are easily disconnected from the frame for storage and transport (below).



Retrofit!

Existing LENTRY Systems of sufficient wattage can be retrofitted to hold two polelights by adding a **Dual Light Base** (lower right). The support bolts underneath any LENTRY EU2000i Frame and holds two telescoping polelights securely at the generator's sides (as shown above).





Truck-Mount Option For Telescoping Lights

The telescoping light or lights on your LENTRY® Generator & Light System can serve as truck-mounted lighting too! The **Truck-Mount Option** holds the polelight firmly to a wall or the side of a truck. From there, it can provide additional light, if installed near an outlet, and is easy to grab for use with the portable LENTRY System.

The **Truck-Mount Option** is ideal for extra tall XT polelights, but also adds functionality to standard height lights. With the turn of a knob, polelights on LENTRY Systems separate from the frame for transport and storage. (Older LENTRY Systems with attached polelights are easily upgraded to allow quick separation, if not already equipped.)

(Right) The Polelight Truck-Mount is shown holding a partially extended 1500W XT polelight.

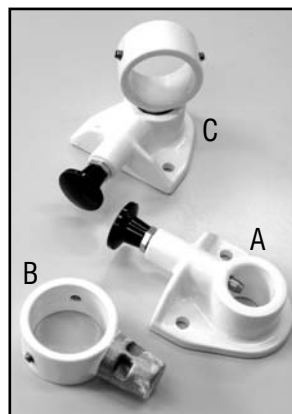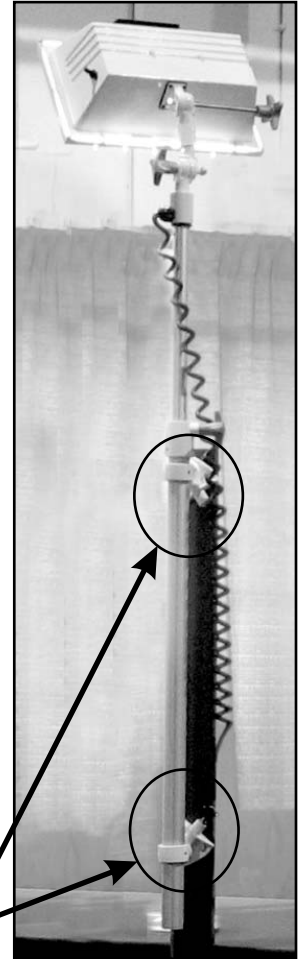

The **Truck-Mount Option** includes two main brackets with plunger mechanisms (A) which are bolted to the truck, and two interlocking rings (B) which are installed on the shaft of the polelight (two rings per pole). The plunger mechanisms hold the rings (and, therefore, the lights) securely in place (C).