



Fixed Light

LENTRY® Portable Light Unit

Approximately 21" high, 32" deep, and 15" wide with light folded forward and down



LENTRY Power & Light Systems are now available with a Fixed 650W halogen light.

This efficient halogen light provides 25,000 lumens of light, twice that of comparable 500W bulbs! The fixed light is available with Honda EU2000i generators.

The fixed light may be aimed up and down along one central plane. It does not telescope or rotate, but independently locking LENTRY Legs allow the unit to be aimed in any direction by allowing positioning of the generator on almost any surface or terrain in seconds.

The fixed 650W light attaches directly to the generator with screws so does not require a light base, as other LENTRY Systems with telescoping lights do. The complete Fixed LENTRY Unit includes a Honda EU2000i generator, legs, and a fixed 650W light.

The Honda EU2000i generator is rated to power this light for more than 12 hours on a 1.1-gallon tank of gas. The complete unit weighs 64 pounds. It stands approximately 44 inches high, with legs extended and the light up. For storage, the legs retract and the light can be bent forward, to measure 21 inches high, 15 wide, 32 deep.


Please see the LENTRY Price List for pricing on all LENTRY Unit models, accessories, and individual components which retrofit to existing generators.



44 inches tall (3.5 feet) as shown. The bulb itself is 3 feet off the ground.



33" high as shown

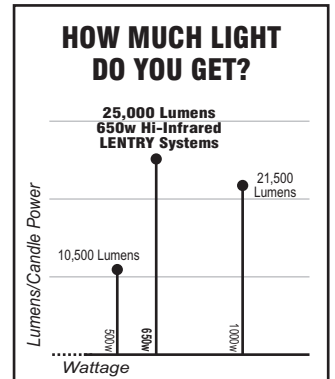

27.5" high, 27.5" deep, and 15" wide with light as shown below

LENTRY® Generator & Light Systems

www.ventry.com

Manufactured by
Ventry Solutions, Inc.
 (888) 257-8967 • (208) 773-1194
 Fax (208) 777-0360
 14128 N Hauser Lake Rd
 Hauser, ID 83854-5619 USA

Honda EU2000i Generator Specs

A/C Output	1600W rated (13.3A) 2000W max (16.7A) 120V
Engine	3.5 hp Honda GX100
Displacement	98.5 cc
D/C Output	12V, 96W (8A)
Receptacles	20A 125V Duplex NEMA Plug 5-20P
Fuel Capacity	1.1 gallons
Run Time on One Tankful of Fuel	Rated load - 4 hrs 650w light - 12.7 hrs 1/4 load - 15 hrs
Noise Level	59 dB at rated load 53 dB at 1/4 load
Warranty	3 years commercial